


## Mounting instructions Planus

**CAUTION!** The electrical lamps have to be mounted without current and by cold state only by a specialist. Also the change of the bulbs has to be made in this state.

### Assembly of the light:

Fix the Planus base to the ceiling/wall and connect the voltage-free power cable to the primary terminal of the electronic transformer. Now insert the bus bar through the holes of the bus bar bracket, the metal contacts must be horizontal. Then tighten the cross-head screws. The bus bar is now mechanically and electrically fixed and ready for use

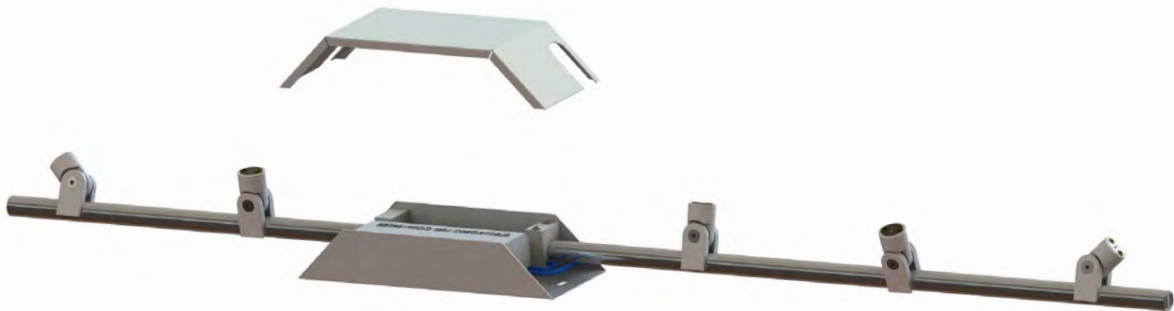

### Cover earthing:

Before you clip the cover onto the lower housing, the ground wire (yellow/green) must be attached to the cover, as well as to the lower housing. Make sure that the bus bar conductor has no contact with the cover groove.

### Bus bar mounting:

With a two-meter-long power rod, two ceiling bus bar brackets should be mounted to each end, so that the bus bar runs parallel to the ceiling. You can then equip the bus bar with the clamp spots. Maximum wattage 250 watts total output.

### Maintenance:

The lamp is made from high quality materials branded with a protective coating are covered. Clean the outside only in de-energized state with a cloth without chemical additives. **WARNING!** The lamp may not be fixated on wet and conductive surface!

## Mounting of the conductor rail

To point ①



Stand 2015 CE