


## Installation instructions "Disque" pool lighting


This spotlight can be integrated into the design of all pool types or retrofitted. The advantage is that no recess is required in the pool wall.

1.  
Drilled hole for V4A Spax 5x70 Ø 8 mm dowel.
2.  
Drilled hole for cable entry Ø 16 mm and 50 mm deep.
3.  
The hole for the electrical supply cable must be drilled at an upward slant as it fills up with water to the level of the pool water. The cable hole in the swimming pool is enlarged to 16x30mm for the plug.

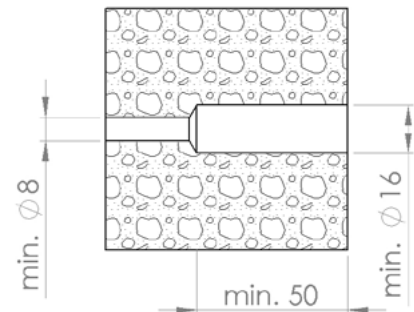

4.  
The spotlight must not be sealed against penetration from the water because it is cooled by the pool water. The spotlight is equipped with a thermal switch which automatically switches the light off when it heats to over 40° and switches it on again when it cools down below 25°. This prevents damage to the LEDs.

5.  
Before you attach the cable connector to the pool spotlight above water the connector should be filled with the supplied silicone gel and then screwed firmly to the socket on the base of the spotlight until the residual silicone is forced out of the rear end of the connector. This will ensure that the electrical contact is waterproof.

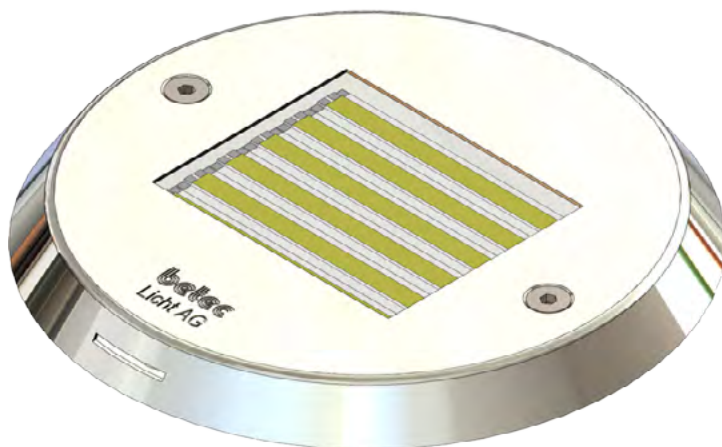


CE  
IP68



Mounting template on the back!

## Drilling template Poolspot "Disque"

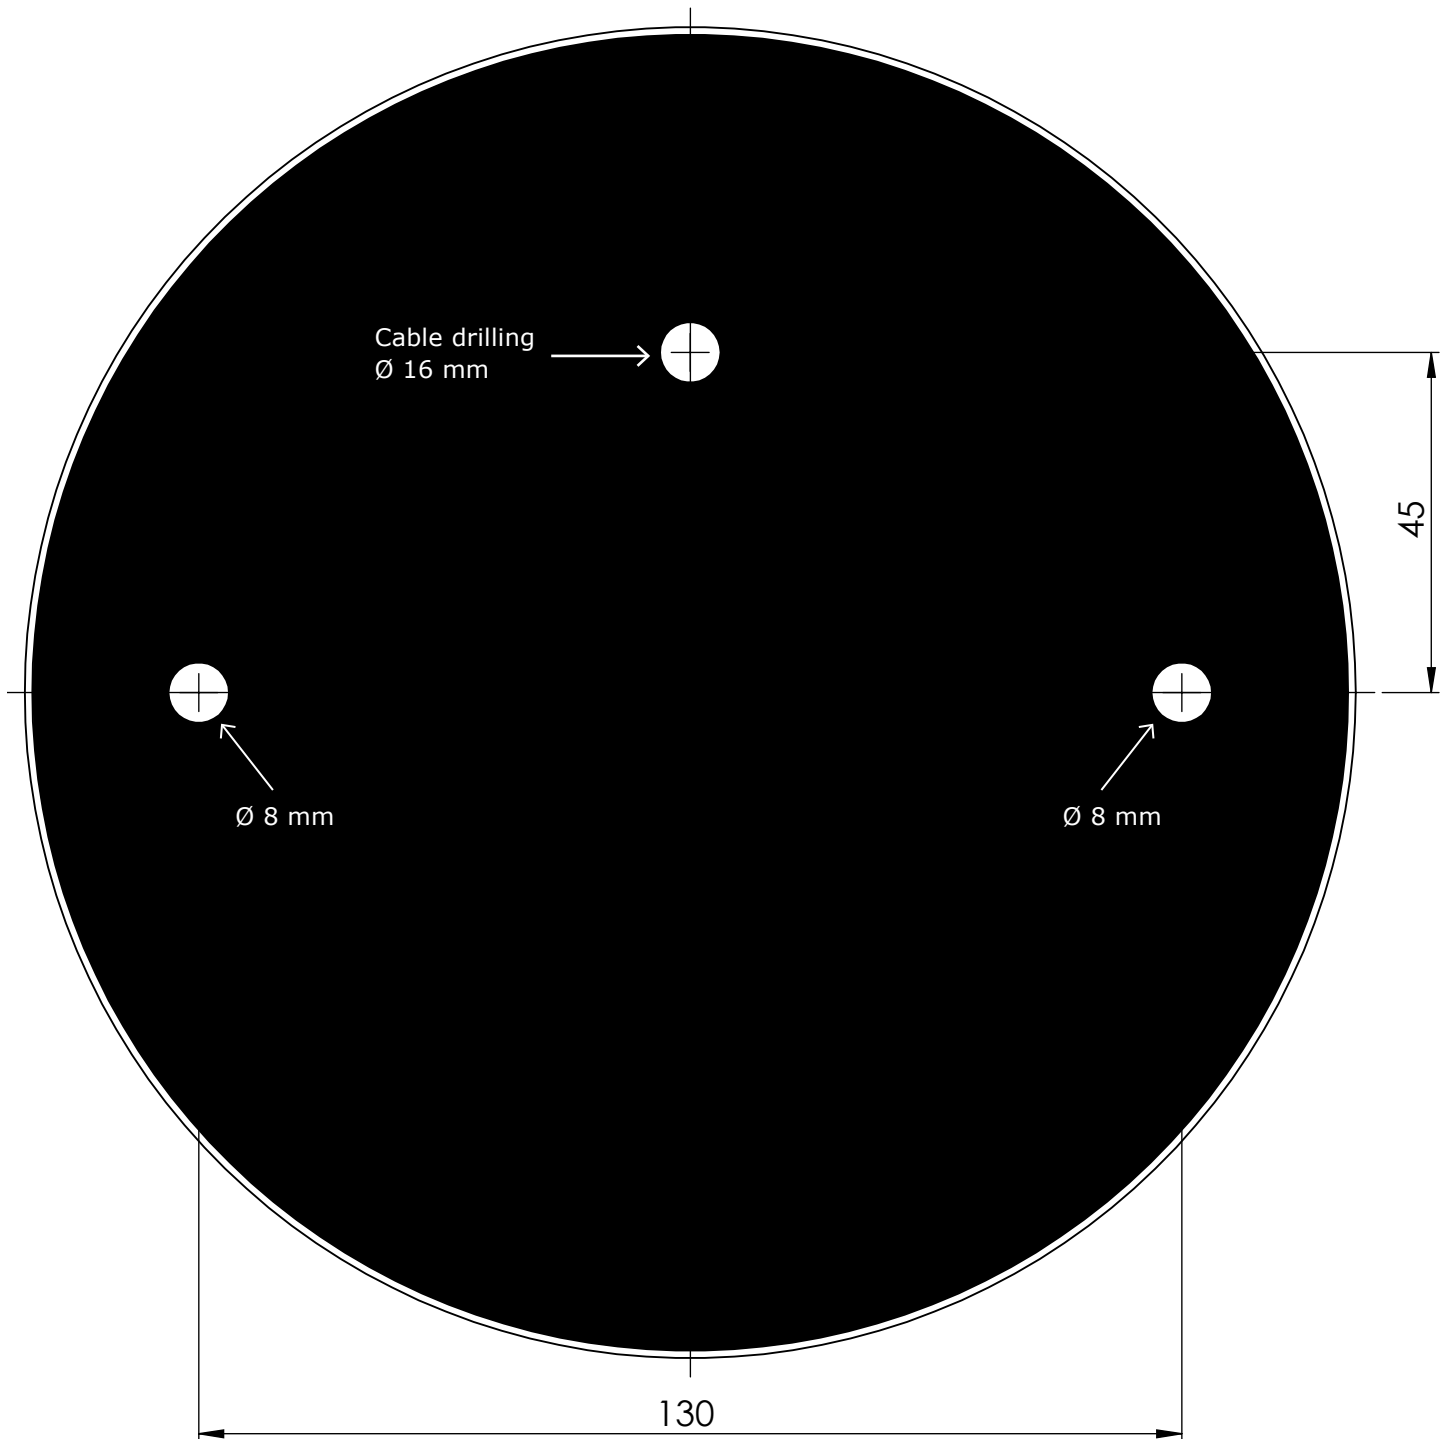

**Example: Drill hole for cable guide above water**

