

27 Galerie 2

Connected load for high-voltage lamps 110 – 230 V as well as for low-voltage operation (LED). Installed as a basic fitting all around rooms in the wall-ceiling joint, paintings can be hung at all heights and distances. At the same time, the electricity for a painting lamp is also conducted. The suspension pendants made of 6-mm round aluminium are available in different lengths. By simply turning them 90°, they are locked in the busbar slot and supplied with electricity. The load of each pendant is 5 kg. For higher loads, several pendants should be used where necessary. A height-adjustable picture hook is mounted at the lower end of each pendant. With this equipment, you can custom decorate and illuminate each vernissage. Ideal for walls with wood panelling or fabric covering.


Material: aluminium, colour: white RAL9016, light output: 110-230 V, Ampere: 10, rail dimensions: 36 x 12 mm, coupling piece dimensions: 40 x 25 mm, pendant head dimensions: 35 x 10 mm

IP20






CE

Design: Horst Lettenmayer © betec

	Product	Length	Article number
	Track	2000 mm	27GS36AS12

As an addition there are the following products:

	Electric picture pendant with power supply and picture hook	1000 mm 2000 mm	27GP010010 27GP020010
	Coupling piece with Electricity feed	40 mm	27KS25PW40

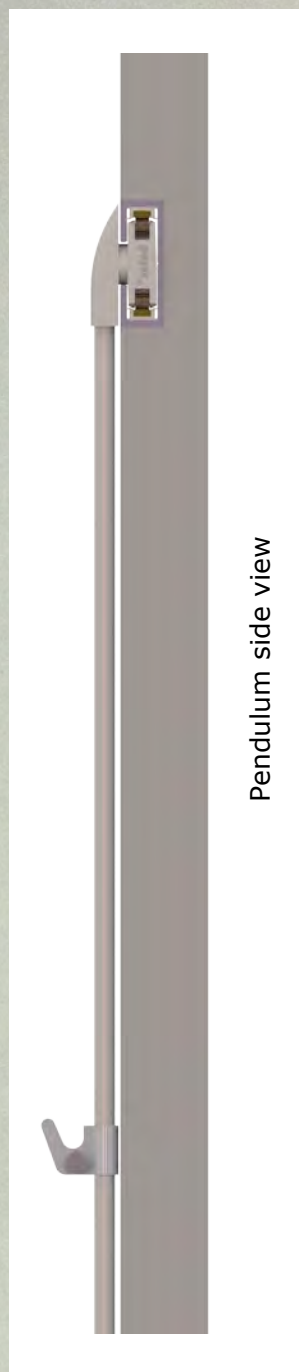

Pendulum side view